

## SAFETY TIPS

- Never give your Personal ID Code to anyone who does not identify themselves as a Network Security Operator.
- Do not keep your Panel Code or Personal ID Code in your wallet where a thief could find it.
- Do not allow strangers in your home. Offer to make emergency calls for them.
- Do not hesitate to call for help if you are confronted or if your suspicions are aroused.
- When returning home, if you suspect an intruder, do not go inside. Find a nearby telephone and call the police.
- Do not put your full name on your mailbox.
- While you are away, make your home seem occupied with automatic timers to turn on lights and radios.
- Ask neighbors to watch your home while you are away, and do the same for them.
- Have your keys in hand and ready to use as you approach your home or car.
- Keep your windows and doors locked at all times.
- Do not drive in a predictable pattern. Vary your route.
- Always be alert. If you suspect you are being followed, do not go home. Go directly to a police or fire station.
- Do not allow newspapers and circulars to accumulate outside your entryway.



Network Multifamily Corporation  
14275 Midway Road, Addison, TX 75001-3681  
800-635-1635  
License #B4888

# USING YOUR NETWORK ALARM

## SYSTEM Z1100


### DON'T FORGET TO:

1. Complete your Resident Alarm Services Agreement and return it to your property staff or office.
2. Make sure that your telephone service is in working order.
3. Make sure that your electrical service is in working order.

### CODES TO REMEMBER

1. **PERSONAL ID CODE.** A 4-digit number, chosen by you, that will identify you to the Network Multifamily operators over the telephone.
2. **PANEL CODE.** Used to arm, disarm and silence your alarm system. The Panel Code must be preceded by a number (1) when arming and disarming your panel.

YOUR 4-DIGIT PANEL CODE IS: 1 + \_\_\_\_\_

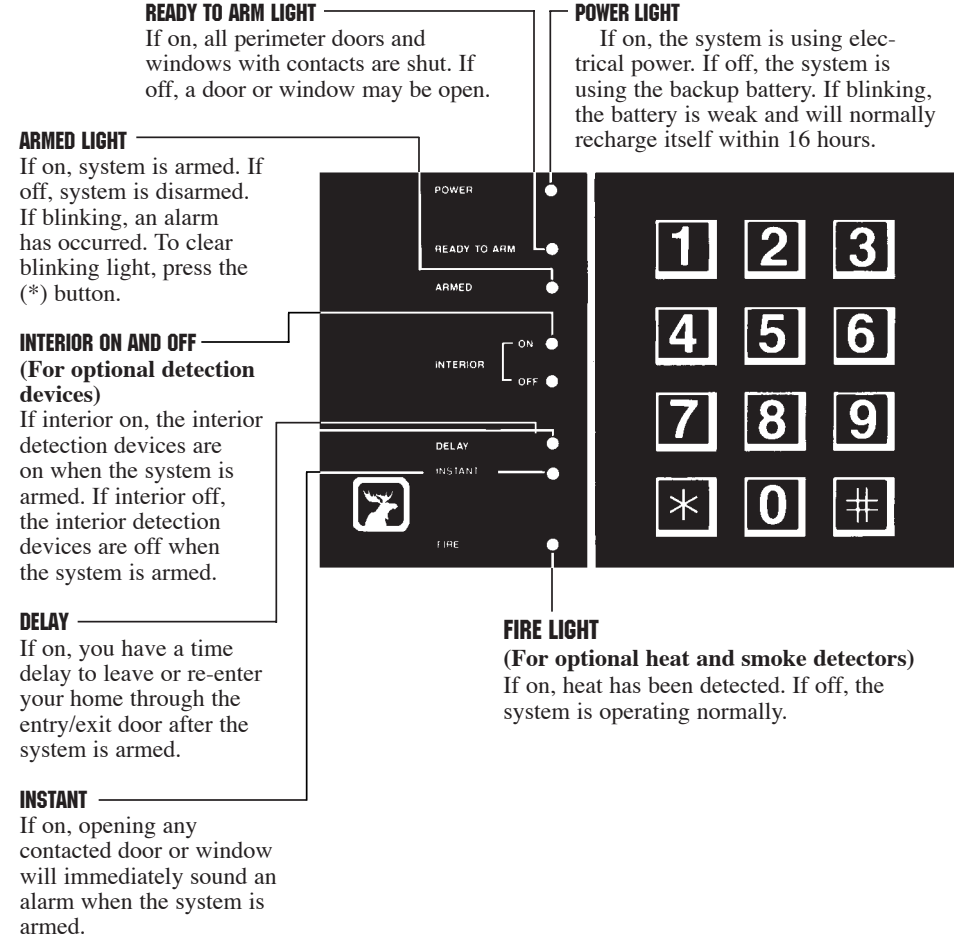

## ARMING YOUR SYSTEM - WHEN LEAVING HOME

1. Green Ready Light must be on. If the light is off, make sure all contacted doors and windows are shut. (To determine which door or window is open without visually inspecting your home, see Zone Status Display.)
2. Press (1) on your panel, followed by your Panel Code.
3. The control panel will begin beeping, the Green Ready Light will go out and the Red Armed Light will come on indicating the system has been armed.
4. You have approximately 60 seconds to leave your home.

## WHEN STAYING HOME

If you want to set your system to immediately sound an alarm if a door or window is opened:

1. Press (5) on your panel, followed by your Panel Code.
2. The Instant Light will come on.
3. Arm the system by pressing (1) on your panel, followed by your Panel Code.

NOTE: When you disarm the system, the zones automatically return to delay.

## DISARMING YOUR SYSTEM - WHEN RETURNING HOME

1. After entering your home through the entry/exit door, a control panel will sound a steady entrance tone warning you to disarm the system.
2. Press (1) on your control panel followed by your Panel Code.
3. If the armed light does not go out, press the (\*) button, then press (1) and re-enter your Panel Code.

NOTE: As you enter through a delay, all other openings automatically convert to the delay mode.

## WHEN STAYING HOME

Before opening any doors or windows, press (1) followed by your Panel Code to disarm the system. Should you decide to leave, just press (1) and re-enter your Panel Code. The Red Armed Light will indicate that you have 60 seconds to leave, and the system will be armed again.

## BEDSIDE ALERT EMERGENCY BUTTONS

When pushed, the alarm will immediately sound, whether your alarm system is armed or disarmed, and whether or not any doors or windows are open. To silence the alarm, press (1) followed by your Panel Code.

## PANEL EMERGENCY BUTTONS

When the (\*) and (#) buttons are pushed at the same time, the alarm will immediately sound, whether your system is armed or disarmed, and whether or not any doors or windows are open. To silence the alarm, press (1) followed by your Panel Code.

## EMERGENCY PROCEDURES - WHEN AN ALARM IS ACTIVATED

1. DO NOT PANIC.
2. Silence the alarm by pressing (1) followed by your Panel Code.  
If you enter the appropriate code within 10 seconds after the alarm is activated, the alarm signal will be aborted.
3. If the alarm is not aborted within the appropriate time, the Network Monitoring Center will call to verify the alarm – request the assistance you need, or cancel the alarm by giving the operator your 4-digit Personal ID Code.

## IF THE ALARM OCCURRED WHILE YOU WERE AWAY

1. The Red Armed Light will be blinking.
2. Lift the cover of the Control Panel to reveal the zone location label.
3. Press (3) to identify the zone that caused the alarm, followed by your Panel Code.
4. The eight lights on the control panel will now become alarm memory indicators.
5. Any light that is on indicates the zone that caused the most recent alarm.
6. You may reset the blinking armed light by pressing the (\*) button.
7. The alarm memory display will remain on for eight seconds after which the system automatically returns back to the normal operating mode. This display time may be extended for eight additional seconds by pressing any key except the (\*) button.

## CHIME

When the chime feature is turned on, all perimeter doors and windows with sensors will emit a sound when opened. This is convenient for those with small children.

## TO TURN THE CHIME ON

1. The system must be disarmed.
2. Press (6) followed by your Panel Code. You will hear four beeps indicating you are in the chime mode.
3. Each time a door or window is opened, you will hear three beeps.

## TO TURN THE CHIME OFF

Press (6) followed by your Panel Code. You will hear four beeps.

## TESTING YOUR ALARM

TO ENSURE THAT YOUR SYSTEM CONTINUES TO OPERATE PROPERLY, IT IS IMPORTANT TO TEST IT AT LEAST MONTHLY.

1. Call Network Multifamily and tell them you want to test your alarm system.
2. Close all doors and windows.
3. Check to see that the Green Ready Light is on.
4. Check each door and window to make sure that, when opened, the Green Ready Light goes off and/or the chime sounds.
5. After at least two minutes have elapsed since you called Network, activate the alarm by pressing the Bedside Alert Button. Wait one minute and then turn the alarm sound off by pressing (1) followed by your Panel Code. Then repeat with any additional Bedside Alert Buttons.
6. Enter your Panel Code to arm the system. The Red Armed Light should go on. If not, request service when you make your verification call to Network Multifamily.
7. Wait at least one minute after arming the panel to allow for the exit delay and open the front door. Let the alarm sound for about a minute, then silence by pressing (1) followed by your Panel Code. You can continue this type of test with any windows and/or patio doors you would like.
8. When you are through testing the system, call Network Multifamily to verify that they have received your alarm signals.

## POINTS TO REMEMBER

1. If unable to obtain a Green Ready Light, check all doors and windows.
2. If your Panel Code fails to arm or disarm your system, press the (\*) button and try again, or check to be sure that your Panel Code is correct.
3. Alarms that are set off by the Emergency Buttons must be silenced by pressing (1) followed by your Panel Code.
4. Alarms that are set off by the opening of a door or window must be silenced by pressing (1) followed by your Panel Code.
5. You must give the Network Monitoring Center operator your 4-digit Personal ID Code to clear a false alarm.
6. We recommend that you test your system once a month.
7. Alarm signals can be transmitted by your telephone line. Therefore, if a signal is being sent to the Monitoring Center, your telephone might not have a dial tone until transmission is complete.
8. If you experience difficulties with your telephone service, notify Network Multifamily before you call your local telephone company. This may avoid unnecessary billings.
9. If you call for service, your system will not be monitored until service is performed.
10. Clear the blinking Armed Light by pushing the (\*) button.
11. If the alarm panel has been disconnected from electrical power for over four hours, it may not function until power is restored.
12. Your Network Multifamily alarm system provides magnetic contacts for the perimeter doors and moveable, accessible windows of your apartment home. If monitored, alarm signals are sent to Network's U.L.-approved monitoring center when the alarm is armed and the door or window is opened or when an emergency feature is activated. Glass breakage and motion detection are not provided by this system.